

---

**EXHAUST BATHROOM  
and LAUNDRY STEAM  
FROM THE HOME**

---

***STEAM*away**

---



A ceiling mounted radial fan with duct exhaust to enable removal of steam and odours direct to atmosphere, as required by the Building Code of Australia.

**S  
D  
N  
O  
M  
E**





Round Diffuser - Model RD

## ROOF SPACE CONDITIONS CAN AFFECT THE HEALTH OF AN ENTIRE HOME.

Traditional round ceiling exhaust fans in bathrooms and laundries deposit steam and odours directly into roof cavities. Steam can condense forming water which penetrates ceiling linings and insulation. This can result in damp, and hence less efficient insulation, and mould growth in ceilings.

## STANDARDS FOR MECHANICAL VENTILATION


There are two standards that cover the requirements for mechanical ventilation of bathrooms and laundries. These are the Building Code of Australia and AS1668.2. The BCA through adherence to AS1668.2., requires that all steam and odours from a home should be exhausted direct to atmosphere, not deposited in a roof cavity. Many councils now enforce this standard with new housing where sarking is used. AS1668.2 specifies the minimum ventilation requirement for bathrooms, toilets and laundries. This is:

Toilet: 25 litres per sec  
 Bathroom - 25 litres per sec  
 Laundry - 20 litres per sec

### STEAMaway Warranty

Edmonds Pty Limited warrants this product when used on domestic premises for 2 years against defects in workmanship, parts or mechanical failure.

Output Curve for STEAMaway

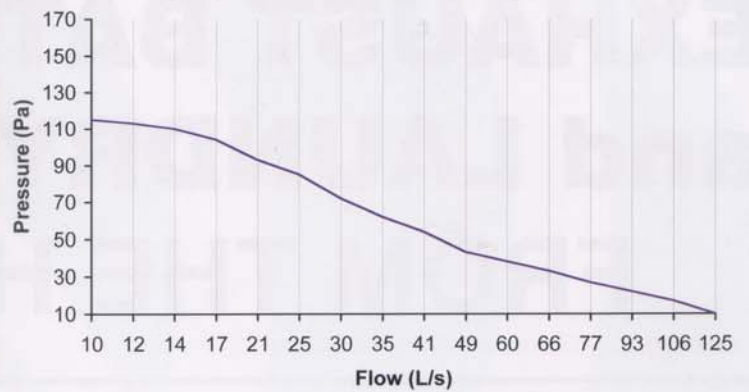

Fan Curve

## SPECIFICATIONS.

Exhaust rate - 45 litres per sec.  
 Power - 23 watt  
 Speed - 1200RPM  
 Noise - 45db  
 Weight - 1.5kg  
 Mount dimensions (mm) 205w x 205L x 160h  
 Warranty - 2 years.  
 Self mounted spring clips.

## OPERATION

Product comes with a 100mm spigot (150mm attachment available) to enable ducting to eaves or roof. Radial fan design is ultra efficient for removal of dense steam.

A gravity shutter prevents back draughting or insect penetration when fan is not operating.

Compact design is ideal for recessed ceiling mounting where limited space is available.

Available in square or round diffuser shapes.

**EDMONDS** PTY LIMITED  
 Technologies for a Sustainable Future

ISSUED BY EDMONDS PTY LIMITED  
 ABN 11 073 056 523

P.O. Box 511, Brookvale N.S.W. AUSTRALIA 2100  
[www.edmonds.com.au](http://www.edmonds.com.au)  
 Email: [sales@edmonds.com.au](mailto:sales@edmonds.com.au)

SYDNEY 1800 674 532 • GOSFORD 4322 1901  
 MELBOURNE 1 800 674 532 • BRISBANE 3272 5455  
 ADELAIDE 8347 4999 • PERTH 1800 674 532



DISTRIBUTED BY